


**22003110**

**Load break switch body SIRCO MV 3P 100A 690 VAC Front or lateral**

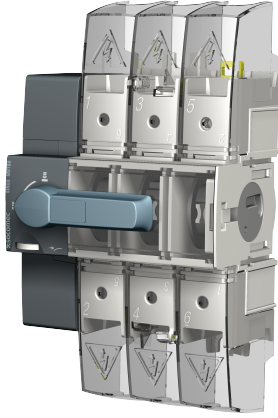

**Strong points**

- Total integration
- A wide range of accessories
- Compliance with major certifications and approvals

**General characteristics**

- Double break per pole.
- IP20 devices and accessories.
- Severe utilisation categories (AC-22 and AC-23).
- Mounting options: DIN rail, back plate or modular panel with 45 mm cut out.
- SIRCO MV: Visible double breaking based on a rotating contact system.

**Compliance with standards**

- IEC 60947-3
- GB/T 14048.3

**Link to the reference**



<https://emea.socomec.com/en/reference/22003110>

SIRCO MV are manually operated modular multipolar load break switches.

They make and break under load conditions and provide safety isolation for any low voltage circuit, particularly for machine control circuits

**Classification**

UNSPSC	39122233
ETIM Class	EC000216
IGCC	5290

**Commerce**

Description	Manual Load break switch with visible breaking SIRCO MV with 3 poles, 100A, 690 VAC - 400 VDC frontal/lateral direct operation with handle type M0, M0b or frontal/lateral external operation with handle type S0, S1. Delivered without handle
Effective date	2007-02-22
Offer Life Cycle Code	40
Country of origin	TN

**ETIM - Electrical characteristics**

Max. rated operation voltage Ue AC [V]	690
Rated operating voltage [V]	400..690
Rated permanent current Iu [A]	100
Rated permanent current at AC-23, 400 V [A]	100
Rated permanent current at AC-21, 400 V [A]	100
Rated short-time withstand current Icw [kA]	7
Rated operation power at AC-23, 400 V [kW]	55
Switching power at 400 V [kW]	55
Conditioned rated short-circuit current Iq [kA]	100
Number of poles	3

**ETIM - Mechanical characteristics**

Suitable for floor mounting	No
Suitable for front mounting 4-hole	No
Suitable for front mounting centre	No
Suitable for distribution board installation	Yes
Suitable for intermediate mounting	Yes
Colour control element	Other
Degree of protection (IP), front side	IP20
Width [mm]	109
Height [mm]	189
Depth [mm]	64

**ETIM - Technical features**

Version as main switch	Yes
Version as maintenance-/service switch	Yes
Version as safety switch	Yes

Version as emergency stop installation	Yes
Version as reversing switch	No
Number of switches	1
Motor drive optional	No
Motor drive integrated	No
Voltage release optional	No
Device construction	Built-in device fixed built-in technique
Type of control element	Other
Interlockable	Yes
Type of electrical connection of main circuit	Screw connection
<b>Logistics</b>	
GTIN/EAN	3596031866014
Customs number	8536508000
Price unit	PC
Weight of the packing unit [kg]	0.837
Length of the packing unit [m]	0.178
Width of the packing unit [m]	0.164
Depth of the packing unit [m]	0.09
<b>Norms</b>	
Conformity to standards	IEC UL
<b>Technical Characteristics</b>	
Height [mm]	189
Width [mm]	109
Depth [mm]	64
Weight [kg]	0.837
Control operator	Direct : M0, M0b / External : S0, S1
Number of poles	3
Rated voltage	690 VAC - 400 VDC
Rated current [A]	100
Type	Front or lateral operation
Frame size	MV