


54113040

TERMINAL DISTRIBUTION BLOCK FOR SIRCO 3 POLES 400 A

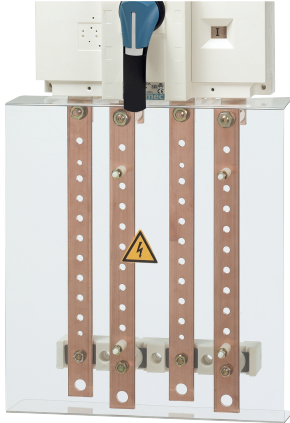

SOCOMEK distribution blocks make it easy to connect conductors. They are mounted downstream of a load break switch, a changeover switch, a fuse switch or any protection device on the market.

Strong points

- Extensive range
- Easy integration

General characteristics

- Lug connection.

Compliance with standards

- IEC 60947-3

Link to the reference



<https://emea.socomec.com/en/reference/54113040>

Classification

| | |
|------------|----------|
| UNSPSC | 39121421 |
| ETIM Class | EC000276 |
| IGCC | 4586 |

Commerce

| | |
|-----------------------|------------|
| Effective date | 1996-09-04 |
| Offer Life Cycle Code | 40 |
| Country of origin | FR |

ETIM - Mechanical characteristics

| | |
|-----------------|----|
| Number of poles | 3 |
| With seal head | No |

Logistics

| | |
|---------------------------------|---------------|
| GTIN/EAN | 3596031347193 |
| Customs number | 8536901000 |
| Price unit | PC |
| Weight of the packing unit [kg] | 3.09 |
| Length of the packing unit [m] | 0.53 |
| Width of the packing unit [m] | 0.29 |
| Depth of the packing unit [m] | 0.07 |

Norms

| | |
|-------------------------|-----|
| Conformity to standards | IEC |
|-------------------------|-----|

Technical Characteristics

| | |
|----------------------|-----|
| Number of conductors | 9 |
| Number of poles | 3 |
| Rated current [A] | 400 |