


**54114025**

## TERMINAL DISTRIBUTION BLOCK FOR SIRCO 4 POLES 250 A

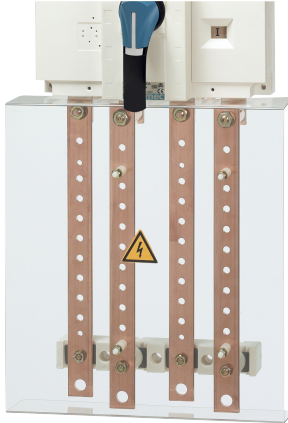

SOCOMEK distribution blocks make it easy to connect conductors. They are mounted downstream of a load break switch, a changeover switch, a fuse switch or any protection device on the market.

### Strong points

- Extensive range
- Easy integration

### General characteristics

- Lug connection.

### Compliance with standards

- IEC 60947-3

### Link to the reference



<https://emea.socomec.com/en/reference/54114025>

### Classification

|            |          |
|------------|----------|
| UNSPSC     | 39121421 |
| ETIM Class | EC000276 |
| IGCC       | 4586     |

### Commerce

|                       |            |
|-----------------------|------------|
| Effective date        | 1993-08-05 |
| Offer Life Cycle Code | 40         |
| Country of origin     | FR         |

### ETIM - Mechanical characteristics

|                 |    |
|-----------------|----|
| Number of poles | 4  |
| With seal head  | No |

### Logistics

|                                 |               |
|---------------------------------|---------------|
| GTIN/EAN                        | 3596031347223 |
| Customs number                  | 8536901000    |
| Price unit                      | PC            |
| Weight of the packing unit [kg] | 0.541         |
| Length of the packing unit [m]  | 0.46          |
| Width of the packing unit [m]   | 0.275         |
| Depth of the packing unit [m]   | 0.03          |

### Norms

|                         |     |
|-------------------------|-----|
| Conformity to standards | IEC |
|-------------------------|-----|

### Technical Characteristics

|                      |     |
|----------------------|-----|
| Number of conductors | 9   |
| Number of poles      | 4   |
| Rated current [A]    | 250 |